



Fusion 48 Port 2U Cat5e Patch Panel

Each panel is supplied with 4 cage nut sets,
12 cable ties and 6 self-adhesive label strips

Part no. T70-2172



- 25 year system warranty
- Krone™ tool compatible
- Optional 2U rear cable management bar available
- Self-adhesive label strips



Materials

Metal frame:	SPCC
Plastic housing:	ABS
RJ45 contact:	Phosphor Bronze with Nickel plating and Gold plating on contact area
IDC housing:	PC
IDC terminal:	Phosphor Bronze with Tin plating


Performance:

Specification:	Category 5e
Port Density:	24 ports per 1U
Wiring Specification:	T568A & T568B
Insertion force:	900 grams for 8 contacts
Retention strength:	7.7Kgs between jack and plug
Operation Temperature:	-40° to 68°
Modular Jack:	750 mating-unmating cycles
IDC:	Up to 200 re-terminations
Compliance:	ANSI/TIA/EIA 568 B.2-1




Optional 2U rear cable
management bars available
(Part no. T70-2181)

Dimensions:

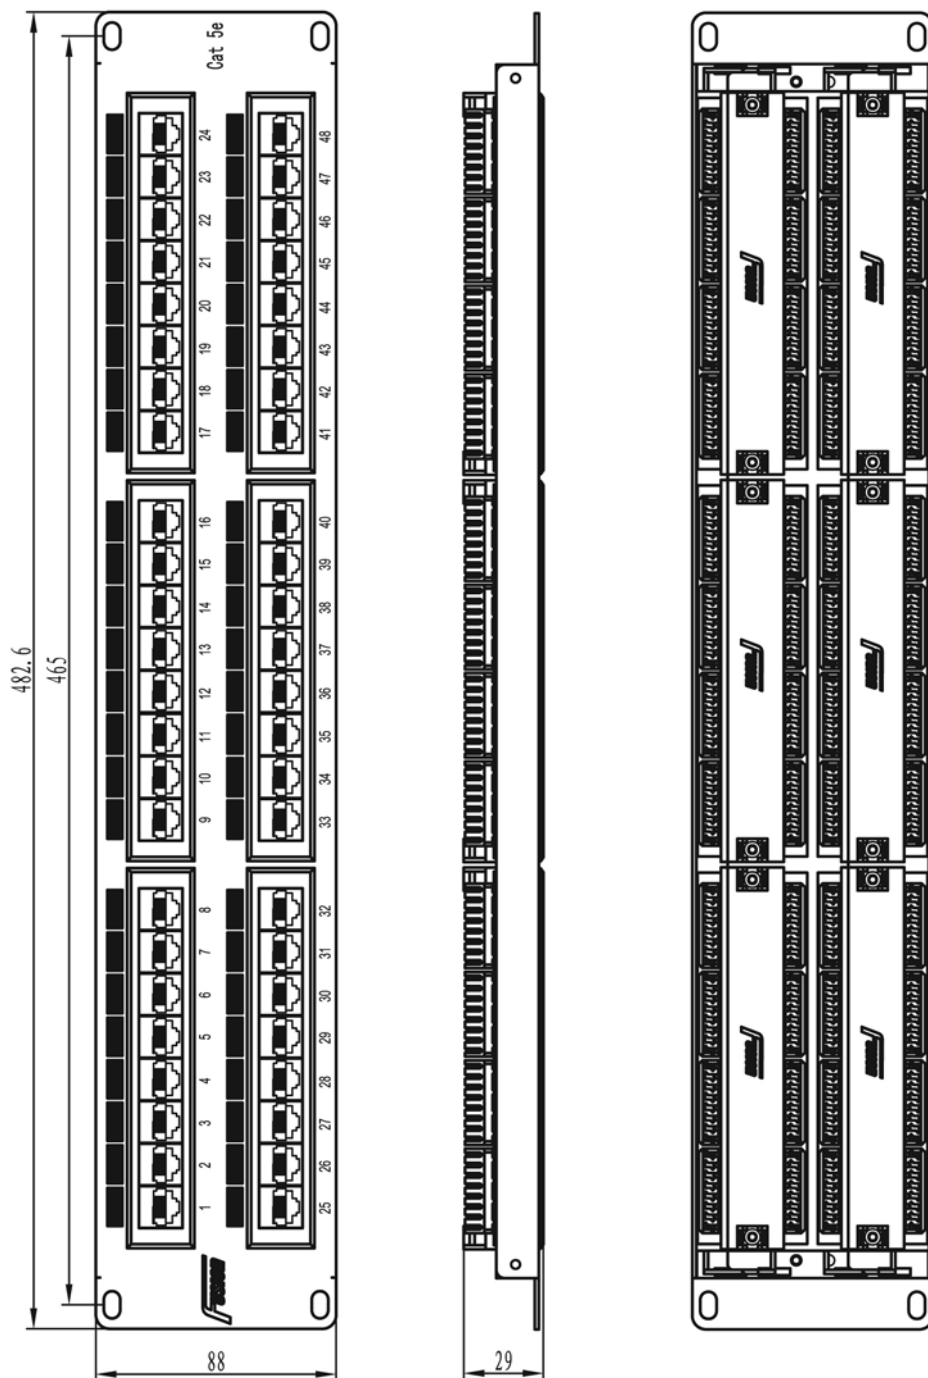

Included:

- Cable tie x 12 pcs
- ID Label x 6 pcs
- Caged nut set 4 pcs



Tel: 0845 370 4709 sales@fusiondatacom.com www.fusiondatacom.com

FUSION DATACOM, PO BOX 556, GREENFORD UB5 9JS, UNITED KINGDOM